


PUSH to disengage

## GN 6337.3 Adjustable clamping levers

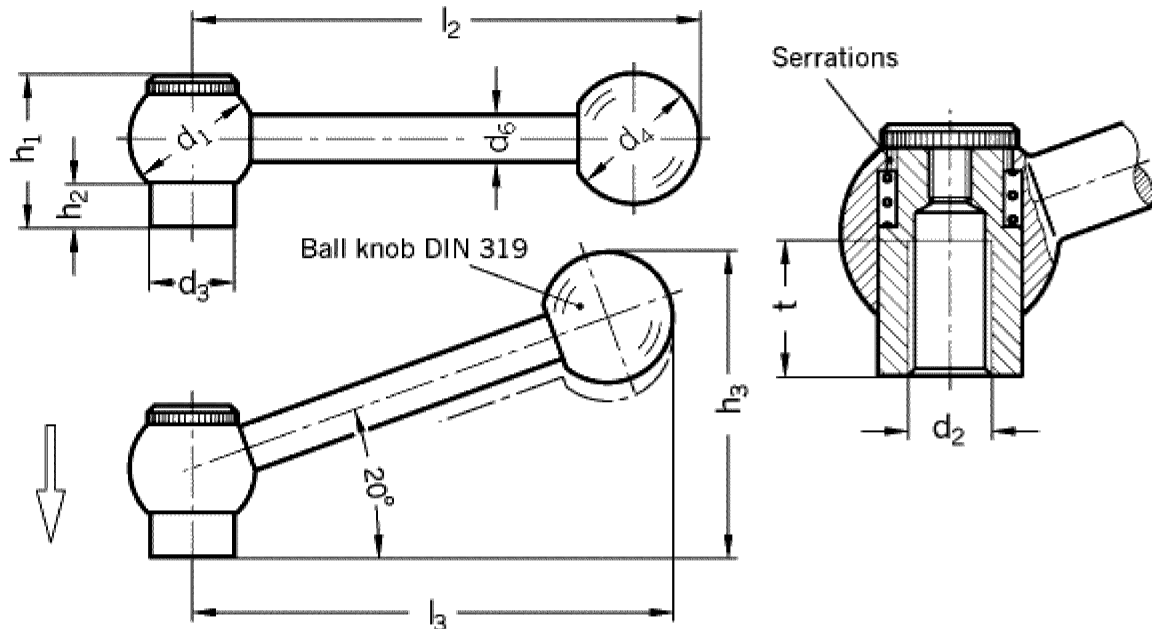

Type **M** straight lever with threaded bore

Type **N** angled lever with threaded bore

d1	d2	d3	d4	d6	h1	h2	h3 <sup>~</sup>	l2	l3 <sup>~</sup>	t	
Thread											
<b>20</b>	<b>M 6</b>	<b>M 8</b>	13,5	20	8,5	25	8	46	74	70	12
<b>25</b>	<b>M 8</b>	<b>M 10</b>	16	25	11	29	8	58	93	87	15
<b>28</b>	<b>M 10</b>	<b>M 12</b>	19	30	13	33,5	10,5	70,5	116	109	18

### Specification

Steel

Tensile strength  
500 N/mm<sup>2</sup>

blackened

### Information

Adjustable clamping levers GN 6337.3 have proved to be ideal whenever parts have to be clamped in a confined space or a particular lever position is required. The insert is connected with the lever via serrations in the ball bore which can be disengaged.

Pushing the lever down, disengages the serrations and the lever can be swivelled to the ideal clamping position. Engagement is achieved by releasing the lever.

Should a rotation of 360 degrees not be possible, the insert can be lightly screwed in (after the lever is disengaged) via a slot in the knurled screw.

### How to order

Adjustable clamping lever

**GN 6337.3-28-M12-N**

Code no. **6337.3**  
d1 **28**  
d2 **M12**  
Type **N**