



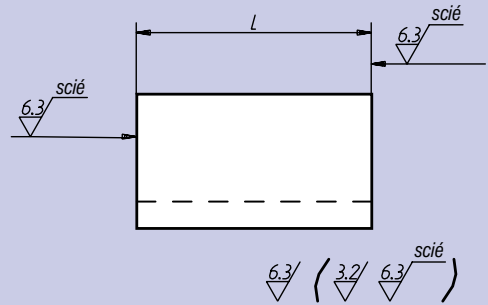

Matière:
Fonte grise stabilisée, GJL 250,
ou alliage léger
Al Zn Mg Cu 1,5 F 50-52.
(AW-7022.)

Exemple de commande:
nIm 01680-06 x 150
(indiquer la cote L).

Surfaces usinées:
± 0,25 mm

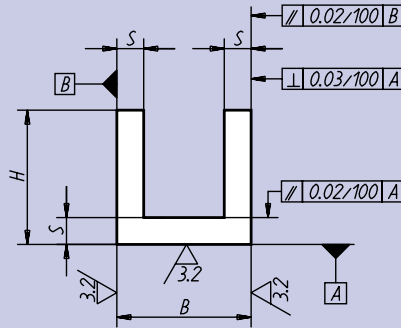

Tolérances sur longueur:
≤ 200 mm: +3/+10
de 201 mm à 590 mm: +8/+15
≥ 600 mm: +20/+50

Référence		L = Longueur						B	H	S	kg, L/100	
Fonte grise	Alu										Fonte	Alu
01680-01 x	01680-201 x	-	-	-	300	-	150	32	32	8	0,47	0,16
01680-02 x	01680-202 x	-	-	-	300	-	150	40	40	10	0,73	0,25
01680-03 x	01680-203 x	-	-	600	300	-	150	63	63	12	1,47	0,50
01680-04 x	01680-204 x	-	800*	600	300	200	-	80	80	16	2,50	0,85
01680-05 x	01680-205 x	1000*	-	600	300	200	-	100	100	20	3,75	1,30
01680-06 x	01680-206 x	1000*	-	600	300	200	-	125	125	20	4,85	1,67
01680-07 x	01680-207 x	-	-	600	300	200	-	160	160	25	7,75	2,67
01680-08 x	01680-208 x	-	-	600	300	200	-	200	200	32	12,50	4,30
01680-09 x	01680-209 x	-	-	600	300	-	-	250	250	36	17,60	6,05
01680-10 x	*01680-210 x	-	-	600	300	-	-	250	200	36	15,00	5,15
01680-11 x	*01680-211 x	-	-	600	300	-	-	315	200	36	16,67	5,73

* longueur maximale, sur demande.

