




**Matière:**  
Acier traité.

**Finition:**  
Bruni.

**Exemple de commande:**  
nim 04378-16050

**Nota:**  
Les entretoises servent de réhausse pour les vérins de bridage et leurs douilles de guidage.

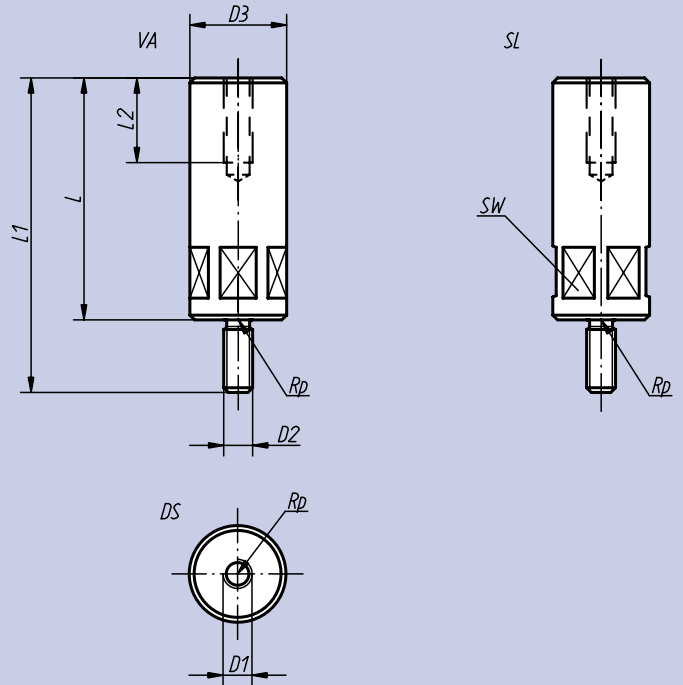

Référence	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	L	L <sub>1</sub>	L <sub>2</sub>	SW	Couple de serrage maxi Nm	kg
04378-08032	M8	M8	24	32	51	20	22	29,4	0,105
04378-08040	M8	M8	24	40	59	20	22	29,4	0,135
04378-08050	M8	M8	24	50	69	20	22	29,4	0,170
04378-08065	M8	M8	24	65	84	20	22	29,4	0,225
04378-08080	M8	M8	24	80	99	20	22	29,4	0,275
04378-08100	M8	M8	24	100	119	20	22	29,4	0,345
04378-12050	M12	M12	40	50	80	35	36	49,0	0,480
04378-12065	M12	M12	40	65	95	35	36	49,0	0,585
04378-12080	M12	M12	40	80	110	35	36	49,0	0,725
04378-12100	M12	M12	40	100	130	35	36	49,0	0,980
04378-12125	M12	M12	40	125	155	35	36	49,0	1,230
04378-12160	M12	M12	40	160	190	35	36	49,0	1,530
04378-12200	M12	M12	40	200	230	35	36	49,0	1,970
04378-16050	M16	M16	50	50	80	35	46	78,4	0,770
04378-16065	M16	M16	50	65	95	35	46	78,4	0,918
04378-16080	M16	M16	50	80	110	35	46	78,4	1,140
04378-16100	M16	M16	50	100	130	35	46	78,4	1,540
04378-16125	M16	M16	50	125	155	35	46	78,4	1,845
04378-16160	M16	M16	60	160	190	35	55	78,4	2,460
04378-16200	M16	M16	60	200	230	35	55	78,4	3,080